
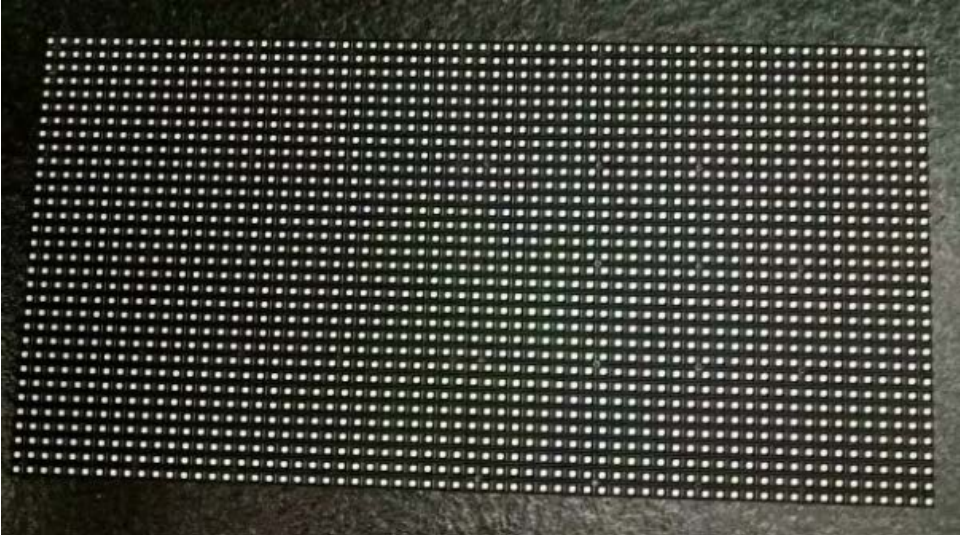



Visualpower P4 outdoor LED display specs data

	Item	Parameter
Unit Module	Model Number	P4
	Module size	256mm*128mm
	Pixel pitch	4mm
	Pixels Density	62500pixels/m2
	Pixel configuration	1R1G1B
	LED lamp	Nationstar SMD1921 
	Pixel resolution	64dots(W)*32dots(H)
	Max Power/module	27.5W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/8
	HUB Port type	HUB75-A
	Brightness of white balance	6000~6500cd/m2
Module pictures	Module front	module back
		

		
LED Cabinet	Dimension	H1024mm*W768mm*D130 mm
	Monomer Module Number	24pcs
	Power supply	5V/40A*4 pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	256mm*128mm
	Best viewing distance	3M~15M
	Best viewing angle	160° (W) 140° (H)
	Temperature	storage:-35℃~+85℃ working:-20℃~+50℃
	Relative humidity	10%-95%
	Thickness	130mm
	Cabinet weight(1024*768 iron closed cabinet)	45KGS
	Power	Working voltage
Average Power consumption		330W/m ²
Max.Power consumption		≤1100W/m ²
Current		≤20mA(single LED)
Control system	CPU	Pentium4 or above
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥10,000hours
	Power switch	110/220V
	Display Mode	≥800*600/1024*768